



AL24A1T

Room controller

Room controller with 0...10 V or 3-point output, primarily intended for control of heating or cooling in zone control systems.

- Setpoint 0...40°C
- Internal or external sensor
- Setting for heating or cooling output

AL24A1T is a room controller for wall mounting. It has 0...10 V or 3-point control signal output. The output is reversible, so the controller can control heating or cooling. The control function can be set to P- or PI-control.

The P-band can be set to 0.5...50 K and the reset time to 2 or 20 minutes.

Sensor

AL24A1T has a built-in temperature sensor.

It is also possible to connect an external sensor to the controller. In this case, the jumper BY1 is set to position External (see description overleaf).

Setpoint

The setpoint is set with the knob on the right side of the housing. The setting can be fixed with a locking screw under the cover.

AL24A1T has an input for change-over that causes the control function to switch between heating or cooling. This input is connected to a closing relay contact. On closed contact the controller works with heating output and on open contact with cooling output.

Setting heating/cooling function

If the external change-over function is not in use, and heating output is desired, a wire must be connected between terminals 7 and 8.

If cooling output function is used, the input is left open.

- 0...10 V or 3-point output
- P- or PI-function
- Adjustable P-band and I-time
- Occupied/Unoccupied mode

Indications

A green LED on the front of the cover indicates supply power on.

Internal indications

The heating/cooling function is indicated by a red LED, marked "H". Red light indicates heating, no light indicates cooling.

There is also an indication for occupancy, a green LED marked "Occ". Green light means occupied mode, no light means unoccupied mode.

Occupied/Unoccupied mode

The setpoint can be adjusted in accordance with an input for occupancy. On open contact on the occupancy detector, the controller setpoint is determined by the setpoint adjuster (occupied mode). On closed contact on the occupancy detector, the setpoint is determined by an internal trimpot (unoccupied mode).

The base setpoint value for the unoccupied mode is 22°C. It can be reset depending on the setting of the potentiometer "Unoccupied". It is adjustable with a span of +/-6°C. See overleaf under the heading "Function selection".

Technical data

Supply voltage	24 V AC +/- 15% 50...60 Hz
Power consumption	2 VA
Ambient temperature	0...50°C
Storage temperature	-40...+50°C
Ambient humidity	Max 90% RH
Protection class	IP20



This product conforms with the requirements of European EMC standards CENELEC EN 61000-1 and EN 61000-3 and carries the CE mark.

Inputs

External sensor	Regin NTC-sensors, 0...40°C (TG-K340 or TG-R640)
Change-over	Potential-free contact
Occupancy	Potential-free contact


Output

Control signal	0...10 V DC, 1 mA or 3-point 24 V AC, 1 A
----------------	---

Settings

Setpoint	0...40°C
P-band	0.5...50 K
Reset-time (I-time)	2 or 20 min, set with jumpers, see below
Unoccupied mode	22°C +/- 6°C

Function selection (jumpers) and Indicators



Jumper BY1	Right = Internal sensor (<i>factory setting</i>) Left = External sensor
Jumper BY2	Closed = Reset time (I-time) is 2 min Open = Reset time (I-time) is 20 min (<i>factory setting</i>)

BY2 only has a function when jumper BY3 is set to PI-control.

Jumper BY3	Closed = P-function Open = PI-function (<i>factory setting</i>)
------------	--


To obtain open position place the jumper on one pin only.

Pot. Unoccupied mode	Position	0	1	2	3	4	5	6
Cooling setp.		22	23	24	25	26	27	28 °C
Heating setp.		22	21	20	19	18	17	16 °C

H (Change-over status)	LED lit = The heating function is active LED not lit = The cooling function is active
Occ (Occupancy status)	LED lit = Occupancy mode LED not lit = Unoccupied mode
PWR	Indicates power on

Wiring and Dimensions

1	Supply voltage 24 V AC
2	System neutral
3	24 V AC (G+) output, for actuator supply
4	3-point output increase
5	3-point output decrease
6	0...10 V DC control output
7	Signal neutral
8	Change-over input (heating function on closing contact)
9	Occupancy input (unoccupied mode on closing contact)
10	External sensor

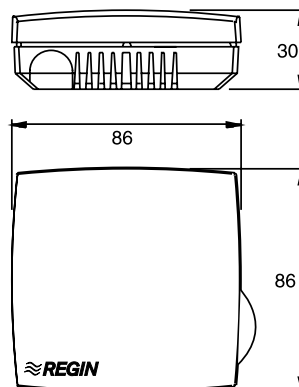

Measurements in mm.

Head Office Sweden
Phone: +46 31 720 02 00
Web: www.regin.se
Mail: info@regin.se

Sales Offices
France: +33 14 171 46 46
Hong Kong: +852 24 07 02 81
Singapore: +65 67 47 82 33

REGIN

THE CHALLENGER IN BUILDING AUTOMATION